



| Art. No.       | d   | D   | B    | $\alpha$ | b    | Typ     | $\emptyset$ | dyn. C [N] |
|----------------|-----|-----|------|----------|------|---------|-------------|------------|
| <b>WR 4</b>    | 1,5 | 4   | 2    | 100°     | 0,4  | A 2Z    | - 0,2       | 78         |
| <b>WR 7</b>    | 3   | 7   | 3    | 100°     | 0,6  | A 2Z    | - 0,2       | 216        |
| <b>WR 10</b>   | 3   | 10  | 4    | 90°      | 0,6  | A 2Z    | - 0,4       | 445        |
| <b>WR 13</b>   | 4   | 13  | 5    | 90°      | 0,8  | A 2Z    | 0,2- 0,5    | 900        |
| <b>WR 16</b>   | 4   | 16  | 5    | 90°      | 1,0  | A 2Z    | 0,5- 0,8    | 1880       |
| <b>WR 17</b>   | 4   | 17  | 6    | 90°      | 1,0  | A 2Z    | 0,5- 0,8    | 1880       |
| <b>WR 19</b>   | 5   | 19  | 6    | 100°     | 1,7  | A 2Z    | 1,0- 1,5    | 2460       |
| <b>WR 21</b>   | 6   | 21  | 6    | 90°      | 2,4  | A 2Z    | 0,7- 1,4    | 2460       |
| <b>WR 22</b>   | 8   | 22  | 7    | 90°      | 1,7  | A 2Z    | 0,8- 1,5    | 3300       |
| <b>WR 23</b>   | 8   | 23  | 7    | 90°      | 1,7  | A 2Z    | 0,8- 1,5    | 3300       |
| <b>WR 26</b>   | 8   | 26  | 7    | 90°      | 3,3  | A 2Z    | 1,0- 2,5    | 3300       |
| <b>WR 30</b>   | 10  | 30  | 14   | 90°      | 3,2  | B 2Z    | 1,5- 3,0    | 8000       |
| <b>WR 300</b>  | 10  | 30  | 8    | 90°      | 3,3  | A 2Z    | 1,0- 3,0    | 4600       |
| <b>WR 31</b>   | 10  | 31  | 14   | 90°      | 3,2  | B 2Z    | 1,5- 3,0    | 6800       |
| <b>WR 32</b>   | 10  | 32  | 14   | 90°      | 4,2  | B 2Z    | 1,5- 4,0    | 6800       |
| <b>WR 320</b>  | 12  | 32  | 16   | 90°      | 4,2  | B 2Z    | 1,5- 4,0    | 10600      |
| <b>WR 3200</b> | 10  | 32  | 9    | 90°      | 4,4  | A 2RS   | 1,5- 4,0    | 4350       |
| <b>WR 35</b>   | 12  | 35  | 16   | 90°      | 4,7  | B 2Z    | 2,0- 4,5    | 8600       |
| <b>WR 350</b>  | 12  | 35  | 10   | 90°      | 4,7  | A 2Z    | 2,0- 4,5    | 5600       |
| <b>WR 3500</b> | 10  | 35  | 9    | 90°      | 4,5  | A 2Z    | 1,5- 3,5    | 6100       |
| <b>WR 3501</b> | 9   | 35  | 18   | R        | R=2  | B 2Z/RK | 2,0- 4,0    | 6700       |
| <b>WR 40</b>   | 15  | 40  | 16   | 90°      | 5,0  | B 2Z    | 3,0- 5,0    | 9800       |
| <b>WR 400</b>  | 15  | 40  | 11   | 90°      | 5,0  | A 2RS   | 3,0- 5,0    | 6500       |
| <b>WR 45</b>   | 12  | 45  | 22   | 110°     | 10,5 | B 2Z/RK | 5,0- 7,0    | 10600      |
| <b>WR 450</b>  | 12  | 45  | 22   | R        | R=4  | B 2Z/RK | 4,0- 8,0    | 10600      |
| <b>WR 47</b>   | 17  | 47  | 17,5 | 90°      | 8,2  | B 2Z    | 4,0- 8,0    | 12600      |
| <b>WR 470</b>  | 17  | 47  | 12   | 90°      | 7,0  | A 2RS   | 4,0- 7,5    | 8400       |
| <b>WR 4700</b> | 15  | 47  | 11   | 90°      | 6,5  | A 2Z    | 3,0- 6,0    | 8400       |
| <b>WR 4701</b> | 15  | 47  | 11   | 90°      | 9,5  | A 2Z    | 5,0- 9,0    | 8400       |
| <b>WR 52</b>   | 12  | 52  | 22   | 110°     | 10,5 | B 2Z/RK | 7,0- 9,0    | 10600      |
| <b>WR 520</b>  | 20  | 52  | 20,6 | 90°      | 9,4  | B 2Z    | 6,0- 9,5    | 15800      |
| <b>WR 521</b>  | 17  | 52  | 22   | 90°      | 10,0 | B 2Z    | 7,0- 10,0   | 12600      |
| <b>WR 5200</b> | 20  | 52  | 14   | 100°     | 8,5  | A 2RS   | 6,0- 8,5    | 10500      |
| <b>WR 5201</b> | 12  | 52  | 22   | R        | R=6  | B 2Z/RK | 8,0- 12,0   | 10600      |
| <b>WR 62</b>   | 25  | 62  | 20,6 | 100°     | 13,0 | B 2Z    | 6,5- 10,5   | 18500      |
| <b>WR 620</b>  | 25  | 62  | 15   | 100°     | 9,7  | A 2RS   | 6,5- 10,0   | 12500      |
| <b>WR 72</b>   | 30  | 72  | 23,8 | 100°     | 12,0 | B 2Z    | 7,0- 12,0   | 24600      |
| <b>WR 720</b>  | 30  | 72  | 16   | 100°     | 11,0 | A 2RS   | 7,0- 11,0   | 16600      |
| <b>WR 74</b>   | 20  | 74  | 35   | R        | R=8  | B 2Z/RK | 8,0- 16,0   | 15800      |
| <b>WR 80</b>   | 25  | 80  | 30   | 100°     | 22,0 | B 2Z/RK | 8,0- 16,0   | 21600      |
| <b>WR 800</b>  | 35  | 80  | 27   | 100°     | 13,0 | B 2Z    | 7,5- 16,0   | 30500      |
| <b>WR 8000</b> | 35  | 80  | 17   | 100°     | 12,5 | A 2RS   | 7,5- 15,0   | 20200      |
| <b>WR 85</b>   | 25  | 85  | 35   | R        | R=12 | B 2Z/RK | 16,0- 24,0  | 21600      |
| <b>WR 1000</b> | 30  | 100 | 40   | R        | R=15 | B 2Z/RK | 24,0- 30,0  | 30000      |
| <b>WR 110</b>  | 35  | 110 | 40   | 100°     | 27,0 | B 2Z/RK | 10,0- 21,0  | 39500      |
| <b>WR 125</b>  | 40  | 125 | 50   | R        | R=20 | B 2Z/RK | 30,0- 40,0  | 55000      |
| <b>WR 1250</b> | 35  | 125 | 55   | 110°     | 45,0 | B 2Z/RK | 14,0- 40,0  | 51000      |
| <b>WR 1251</b> | 30  | 125 | 38   | 100°     | 30,0 | B 2Z/RK | 15,0- 27,0  | 39500      |
| <b>WR 150</b>  | 40  | 150 | 80   | R        | R=30 | B 2Z/RK | 40,0- 60,0  | 100000     |
| <b>WR 1500</b> | 40  | 150 | 80   | 100°     | 46,0 | B 2Z/RK | 18,0- 40,0  | 100000     |
| <b>WR 240</b>  | 45  | 240 | 100  | R        | R=50 | B 2Z/RK | 20,0- 50,0  | 164000     |

Richtrollen  
Galets de dressage  
Straightening rollers

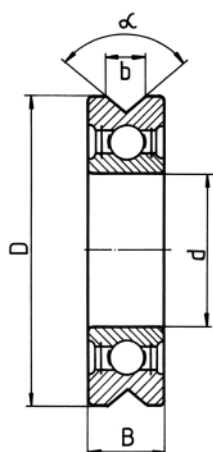

Typ A

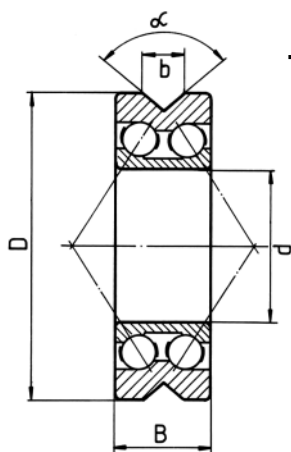

Typ B

