




IR

Ø	-6,0	-12,0	6,0-50,0	10,0-100,0	20,0-160,0	50,0-250,0
TYPE	IR 6	IR 12	IR 50	IR 100	IR 160	IR 250
A	38	50	82	100	120	160
B	4,5	6	12,5	10	15	17,5
C	29	38	57	80	90	125
D / D1	17/17	25/25	40/40	60/60	80/60	100/80
E	60	85	165	260	370	540
F	20	20	36	50	50	75
G	20	45	93	160	270	390
H / H1	30/30	42,5/42,5	82,5/82,5	130/130	185/185	270/203
I	28	32,5	65	75	100	100
J	22	27	47,5	115	185	228
K	18	20	30	45	50	60
L / L1	20/20	32/23	60/60	120/120	200/120	250/200
M	44	59,5	139,5	191	251	350
N	4,5	5,5	6,6	9	13	17
O	24	30	100	125	160	200
P	21,5	26,5	41	62	65	85
T	8	10	15	20	20	30
U	0	0	0	0	0	67
kg	0,3	1	6	13	28	62

Rollenführung mit einzeln verstellbaren Rollen
 Guidage à galets réglables séparément
 Roller guide with individual adjustable rollers

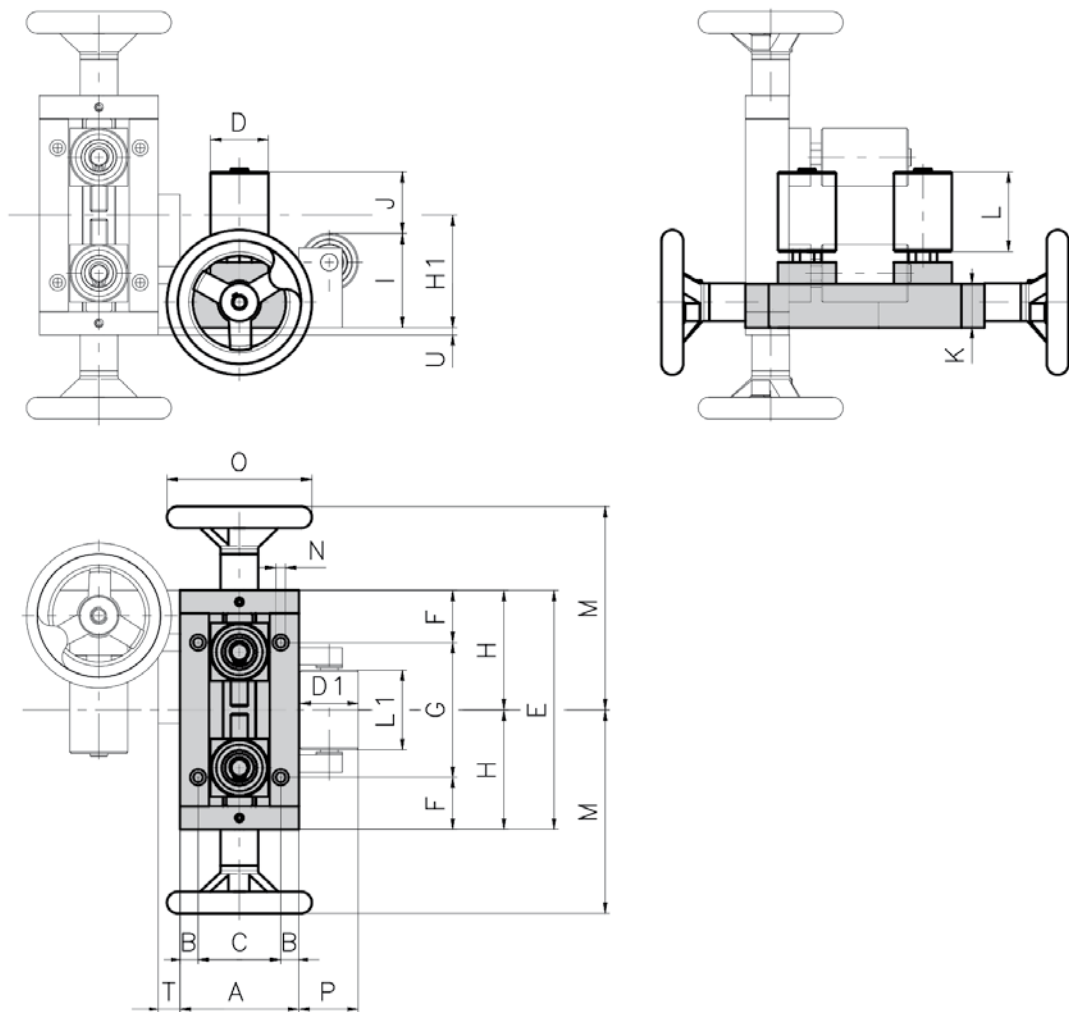